


AD-A113 287


DAVID W TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CE--ETC F/6 13/10
USS OLIVER HAZARD PERRY (FFG-7) STANDARDIZATION TRIALS.(U)
FEB 79 E L WOO

UNCLASSIFIED

DTNSROC-79/022

NL

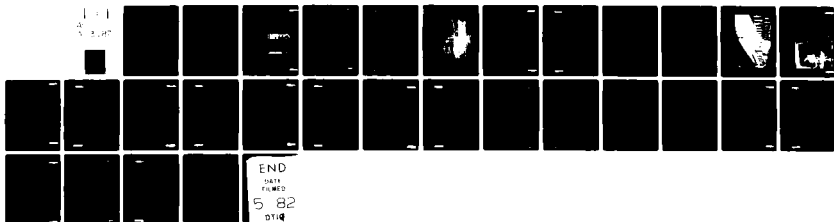

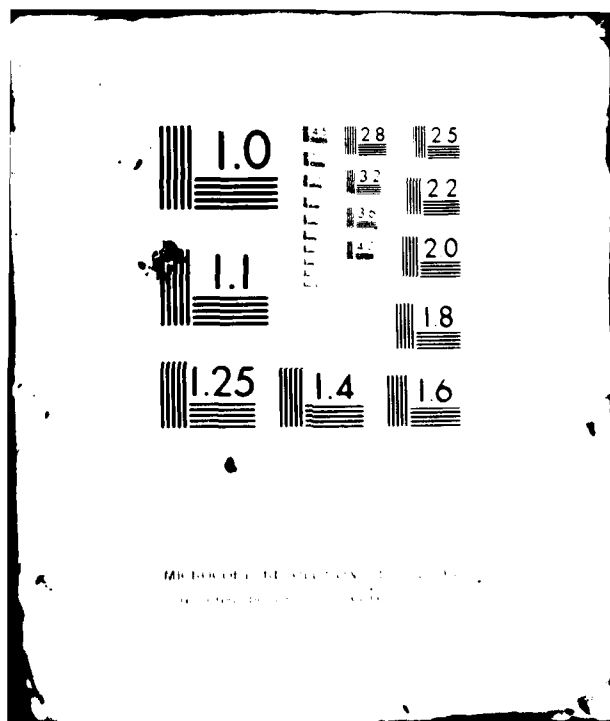

DTNSRDC-79/022

AD A113287

USS OLIVER HAZARD PERRY (FFG-7) STANDARDIZATION TRIALS (U)

DTIC FILE COPY

DAVID W. TAYLOR NAVAL SHIP RESEARCH AND DEVELOPMENT CENTER

Bethesda, Maryland 20084



USS OLIVER HAZARD PERRY (FFG-7) STANDARDIZATION TRIALS (U)

by

Everett L. Woo

APPROVED FOR public release
distribution unlimited 23 Feb 82

SHIP PERFORMANCE DEPARTMENT
RESEARCH AND DEVELOPMENT REPORT

DTIC
SELECT
APR 7 1982
A


February 1979

DTNSRDC-79/022

83

82 04 07 060

MAJOR DTNSRDC ORGANIZATIONAL COMPONENTS

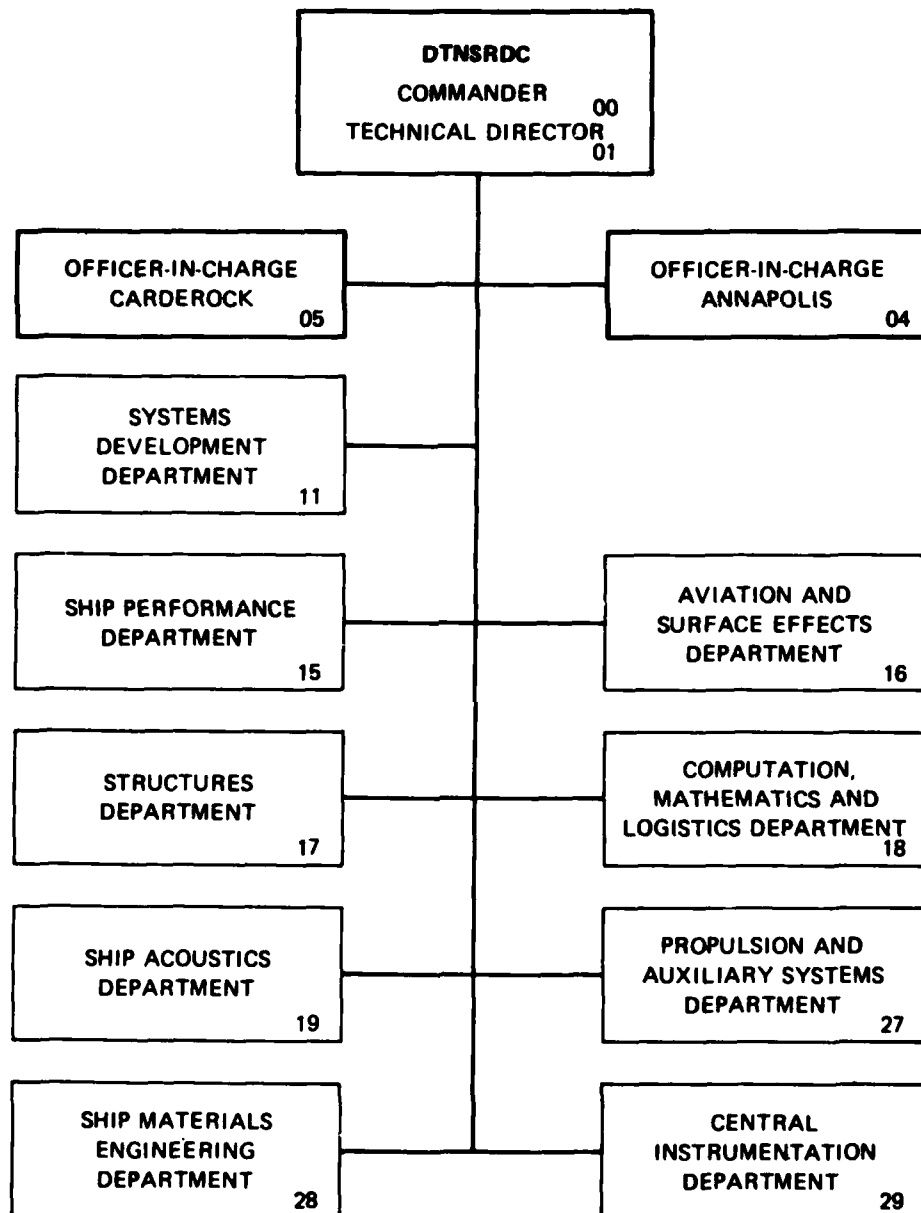

BETHESDA, MARYLAND 20084

by

Everett L. Woo

APPROVED FOR public release:
distribution unlimited

February 1979

DTNSRDC-79/022

1. Address
 2. City
 3. State
 4. Zip
 5. Phone
 6. Age
 7. Sex
 8. Marital Status
 9. Occupation
 10. Education
 11. Religion
 12. Interests
 13. Signature
 14. Date
 15. Initials
 16. Comments
 17. Remarks
 18. Notes
 19. Other
 20. Signature
 21. Date
 22. Initials
 23. Comments
 24. Remarks
 25. Notes
 26. Other
 27. Signature
 28. Date
 29. Initials
 30. Comments
 31. Remarks
 32. Notes
 33. Other
 34. Signature
 35. Date
 36. Initials
 37. Comments
 38. Remarks
 39. Notes
 40. Other
 41. Signature
 42. Date
 43. Initials
 44. Comments
 45. Remarks
 46. Notes
 47. Other
 48. Signature
 49. Date
 50. Initials
 51. Comments
 52. Remarks
 53. Notes
 54. Other
 55. Signature
 56. Date
 57. Initials
 58. Comments
 59. Remarks
 60. Notes
 61. Other
 62. Signature
 63. Date
 64. Initials
 65. Comments
 66. Remarks
 67. Notes
 68. Other
 69. Signature
 70. Date
 71. Initials
 72. Comments
 73. Remarks
 74. Notes
 75. Other
 76. Signature
 77. Date
 78. Initials
 79. Comments
 80. Remarks
 81. Notes
 82. Other
 83. Signature
 84. Date
 85. Initials
 86. Comments
 87. Remarks
 88. Notes
 89. Other
 90. Signature
 91. Date
 92. Initials
 93. Comments
 94. Remarks
 95. Notes
 96. Other
 97. Signature
 98. Date
 99. Initials
 100. Comments
 101. Remarks
 102. Notes
 103. Other
 104. Signature
 105. Date
 106. Initials
 107. Comments
 108. Remarks
 109. Notes
 110. Other
 111. Signature
 112. Date
 113. Initials
 114. Comments
 115. Remarks
 116. Notes
 117. Other
 118. Signature
 119. Date
 120. Initials
 121. Comments
 122. Remarks
 123. Notes
 124. Other
 125. Signature
 126. Date
 127. Initials
 128. Comments
 129. Remarks
 130. Notes
 131. Other
 132. Signature
 133. Date
 134. Initials
 135. Comments
 136. Remarks
 137. Notes
 138. Other
 139. Signature
 140. Date
 141. Initials
 142. Comments
 143. Remarks
 144. Notes
 145. Other
 146. Signature
 147. Date
 148. Initials
 149. Comments
 150. Remarks
 151. Notes
 152. Other
 153. Signature
 154. Date
 155. Initials
 156. Comments
 157. Remarks
 158. Notes
 159. Other
 160. Signature
 161. Date
 162. Initials
 163. Comments
 164. Remarks
 165. Notes
 166. Other
 167. Signature
 168. Date
 169. Initials
 170. Comments
 171. Remarks
 172. Notes
 173. Other
 174. Signature
 175. Date
 176. Initials
 177. Comments
 178. Remarks
 179. Notes
 180. Other
 181. Signature
 182. Date
 183. Initials
 184. Comments
 185. Remarks
 186. Notes
 187. Other
 188. Signature
 189. Date
 190. Initials
 191. Comments
 192. Remarks
 193. Notes
 194. Other
 195. Signature
 196. Date
 197. Initials
 198. Comments
 199. Remarks
 200. Notes
 201. Other
 202. Signature
 203. Date
 204. Initials
 205. Comments
 206. Remarks
 207. Notes
 208. Other
 209. Signature
 210. Date
 211. Initials
 212. Comments
 213. Remarks
 214. Notes
 215. Other
 216. Signature
 217. Date
 218. Initials
 219. Comments
 220. Remarks
 221. Notes
 222. Other
 223. Signature
 224. Date
 225. Initials
 226. Comments
 227. Remarks
 228. Notes
 229. Other
 230. Signature
 231. Date
 232. Initials
 233. Comments
 234. Remarks
 235. Notes
 236. Other
 237. Signature
 238. Date
 239. Initials
 240. Comments
 241. Remarks
 242. Notes
 243. Other
 244. Signature
 245. Date
 246. Initials
 247. Comments
 248. Remarks
 249. Notes
 250. Other
 251. Signature
 252. Date
 253. Initials
 254. Comments
 255. Remarks
 256. Notes
 257. Other
 258. Signature
 259. Date
 260. Initials
 261. Comments
 262. Remarks
 26

TABLE OF CONTENTS

	Page
LIST OF FIGURES.....	111
LIST OF TABLES.....	111
FRONTISPIECE.....	v
ABSTRACT.....	1
ADMINISTRATIVE INFORMATION.....	1
INTRODUCTION.....	1
TRIAL CONDITIONS.....	2
TRIAL PROCEDURES AND INSTRUMENTATION.....	9
PRESENTATION AND DISCUSSION OF TRIAL RESULTS.....	16
CONCLUSIONS.....	22

LIST OF FIGURES

1 - View of Hull and Bilge Keel.....	5
2 - View of Propeller and Rudder.....	7
3 - Comparison of Heavy and Light Displacement Standardization Trial Results, English Units.....	17
4 - Comparison of Heavy and Light Displacement Standardization Trial Results, Metric Units.....	18
5 - Comparison of Heavy Displacement Standardization Trial Results Utilizing Different Propeller Pitch Settings, English Units.....	19
6 - Comparison of Heavy Displacement Standardization Trial Results Utilizing Different Propeller Pitch Settings, Metric Units.....	20

LIST OF TABLES


1 - Ship and Propeller Characteristics.....	3
2 - Trial Conditions.....	4

UNCLASSIFIED

	Page
3 - USS OLIVER HAZARD PERRY (FFG-7) Standardization Trial Results, English Units.....	10
4 - USS OLIVER HAZARD PERRY (FFG-7) Standardization Trial Results, Metric Units.....	13

UNCLASSIFIED

UNCLASSIFIED

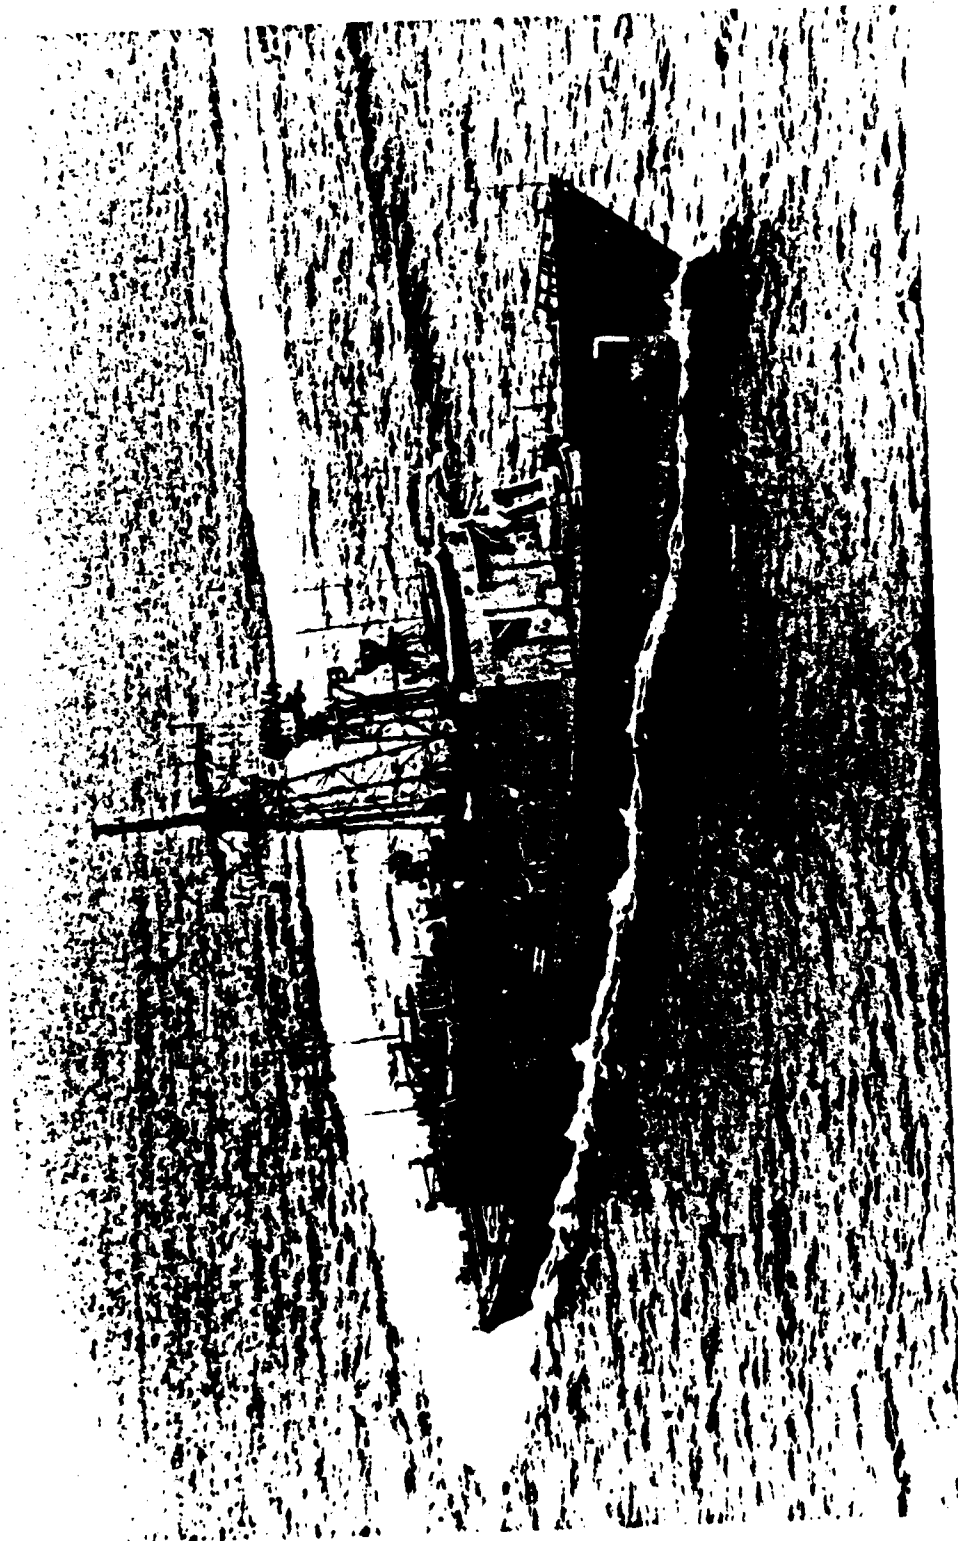

USS OLIVER HAZARD PERRY (FFG-7) (U)

UNCLASSIFIED



ABSTRACT

(U) This report contains the results of heavy and light displacement standardization trials conducted on USS OLIVER HAZARD PERRY (FFG-7). Measurements of shaft rpm, shaft horsepower, shaft torque, thrust, propeller pitch, ship speed, ship's heading, and relative wind velocity and direction were made throughout the speed range of 6 knots to full power. Heavy and light displacement standardization trials were conducted in the program control power mode utilizing single and twin engine modes of operation with single engine powering performance data comparing favorably with that of twin-engine. Heavy displacement twin-engine standardization trials were undertaken comparing design, over-design, and under-design pitch. Speed attainable at rated power for single and twin auxiliary propulsion units was determined. Very poor directional controllability was experienced with auxiliary propulsion units in operation.

ADMINISTRATIVE INFORMATION

(U) The standardization trials on USS OLIVER HAZARD PERRY (FFG-7) were performed in accordance with Naval Sea Systems Command (NAVSEA) letter PMS-399/GMcN, Serial 1625 of 19 August 1977. This project was carried out under David W. Taylor Naval Ship Research and Development Center (DTNSRDC) Work Unit Number 1-1536-180.

INTRODUCTION

(C) USS OLIVER HAZARD PERRY (FFG-7) is the first of a new class of guided missile frigates displacing 3720 tons (3780 tonnes) in the heavy displacement configuration. PERRY was built by Bath Iron Works, Bath, Maine, and commissioned on 17 December 1977. PERRY is powered by two General Electric LM 2500 gas turbines; a double reduction, double helical, locked-train reduction gear; single shaft; and a five-bladed controllable-reversible pitch (CRP) propeller. The propulsion system is capable of automated control (in a power or speed mode) of the gas turbines as well as remote manual control. Two electric auxiliary propulsion units provide emergency "take-home" power. PERRY is also equipped with the Prairie Masker system to ensure quiet operation and to mask acoustic signature characteristics.

(U) Standardization trials were conducted on PERRY at the three-dimensional tracking range at the Atlantic Fleet Weapons Training Facility (AFWTF),

[REDACTED]

St. Croix, Virgin Islands during 12-13 and 19-20 May 1978. These trials were carried out by representatives of the David W. Taylor Naval Ship Research and Development Center and AFWTF tracking range personnel with assistance from the ship's force.

TRIAL CONDITIONS

(U) Ship and propeller characteristics and trial conditions are listed in Tables 1 and 2. The last complete painting of the ship's underwater hull area prior to these trials was accomplished during a docking at Boston Marine Industrial Park, Drydock Number 1, between 24 February 1978 and 10 March 1978. Before paint application, the hull and struts were water washed and the top layer of paint sandblasted. It was then recoated. The rudder was sandblasted down to white metal and then repainted. The following paint was applied:

1. Bottom - Existing paint, 4400 (4 mils) and 4413 (4 mils), recoated with 1 coat 4413 primer (4 mils), 2 coats red 121 antifouling (2 mils).
2. Boot Topping - Two coats black 129 antifouling (2 mils).
3. Rudder - Two coats 4413 primer (4 mils), 2 coats 121 antifouling (2 mils).
4. Strut - Existing paint, 4400 (4 mils), and 4413 (4 mils), recoated with 1 coat 4413 primer (4 mils) 2 coats red 121 antifouling (2 mils).
5. Shafting - Two coats 121 antifouling (4 mils).

(U) Figure 1 shows a view of the port side of the hull and the bilge keel. Figure 2 is a view of the propeller and rudder. A pitch calibration was conducted under hot and cold hydraulic oil conditions and the propeller hub was scribed for easy diver inspection during the trials. This calibration indicated that actual propeller pitch would vary from indicated pitch by a maximum of 6 inches (152.4 millimeters). Later pitch checks at Mayport, Florida and at St. Croix also verified that indicated pitch readings would be in error by no more than 6 inches (152.4 millimeters).

(U) Sea conditions were acceptable throughout the trial period (State 1 to a high State 2 sea). The average true wind velocity for the standardization trials was 17 knots. Table 2 gives a more in-depth look at the trial conditions.

UNCLASSIFIED**TABLE 1 - SHIP AND PROPELLER CHARACTERISTICS (U)****UNCLASSIFIED**

SHIP CHARACTERISTICS	
Length Overall (LOA), feet (meters)	445.0 (135.6)
Length between Perpendiculars (LBP), feet (meters)	408.0 (124.4)
Breadth, Extreme, feet (meters)	47.0 (14.3)
Number of Rudders	1
Rudder Area, square feet (square meters)	193.7 (18.4)
PROPELLER CHARACTERISTICS	
Type of Propeller	Controllable-Reversible Pitch (CRP)
Number of Propellers	1
Number of Blades	5
Diameter, feet (meters)	16.5 (5.0)
Design Pitch at 0.7 Radius, feet (meters)	23.5 (7.2)
Projected Area, square feet (square meters)	129.8 (12.1)
Disc Area, square feet (square meters)	213.8 (19.9)
Projected Area Divided by Disc Area	0.607
Expanded Area, square feet (square meters)	157.9 (14.7)
Mean Width Ratio	0.336
Blade Thickness Fraction	0.083
Pitch Ratio at 0.7 Radius	1.42
Propeller Serial Number	28220D
Propeller Drawing Number	Bird Johnson 11565-1011
Propeller Hub Number	28227
Propeller Composition	Nickel-Aluminum-Bronze

UNCLASSIFIED

UNCLASSIFIED

TABLE 2 - TRIAL CONDITIONS (U)

UNCLASSIFIED

Displacement ton		tonne	Average True Wind Direction deg	Average True Wind Velocity knot	Trim		Water Temperature		Air Temperature		Water Specific Gravity
					ft	m	deg F	deg C	deg F	deg C	
12 May 1978, 63 Days Out of Dock, State 1-2 Sea											
3720	3780		96	16	0.50*	0.15*	83	28.3	83	28.3	1.025
13 May 1978, 64 Days Out of Dock, State 1 Sea											
3680	3739		107	15	0.83*	0.25*	82	27.8	83	28.3	1.025
19 May 1978, 70 Days Out of Dock, State 2 Sea											
3400	3454		61	20	1.08**	0.33**	82	27.8	83	28.3	1.025
20 May 1978, 71 Days Out of Dock, State 2 Sea											
3320	3373		107	20	1.50**	0.46**	82	27.8	84	28.9	1.025

*Trim by bow.
**Trim by stern.

UNCLASSIFIED

UNCLASSIFIED


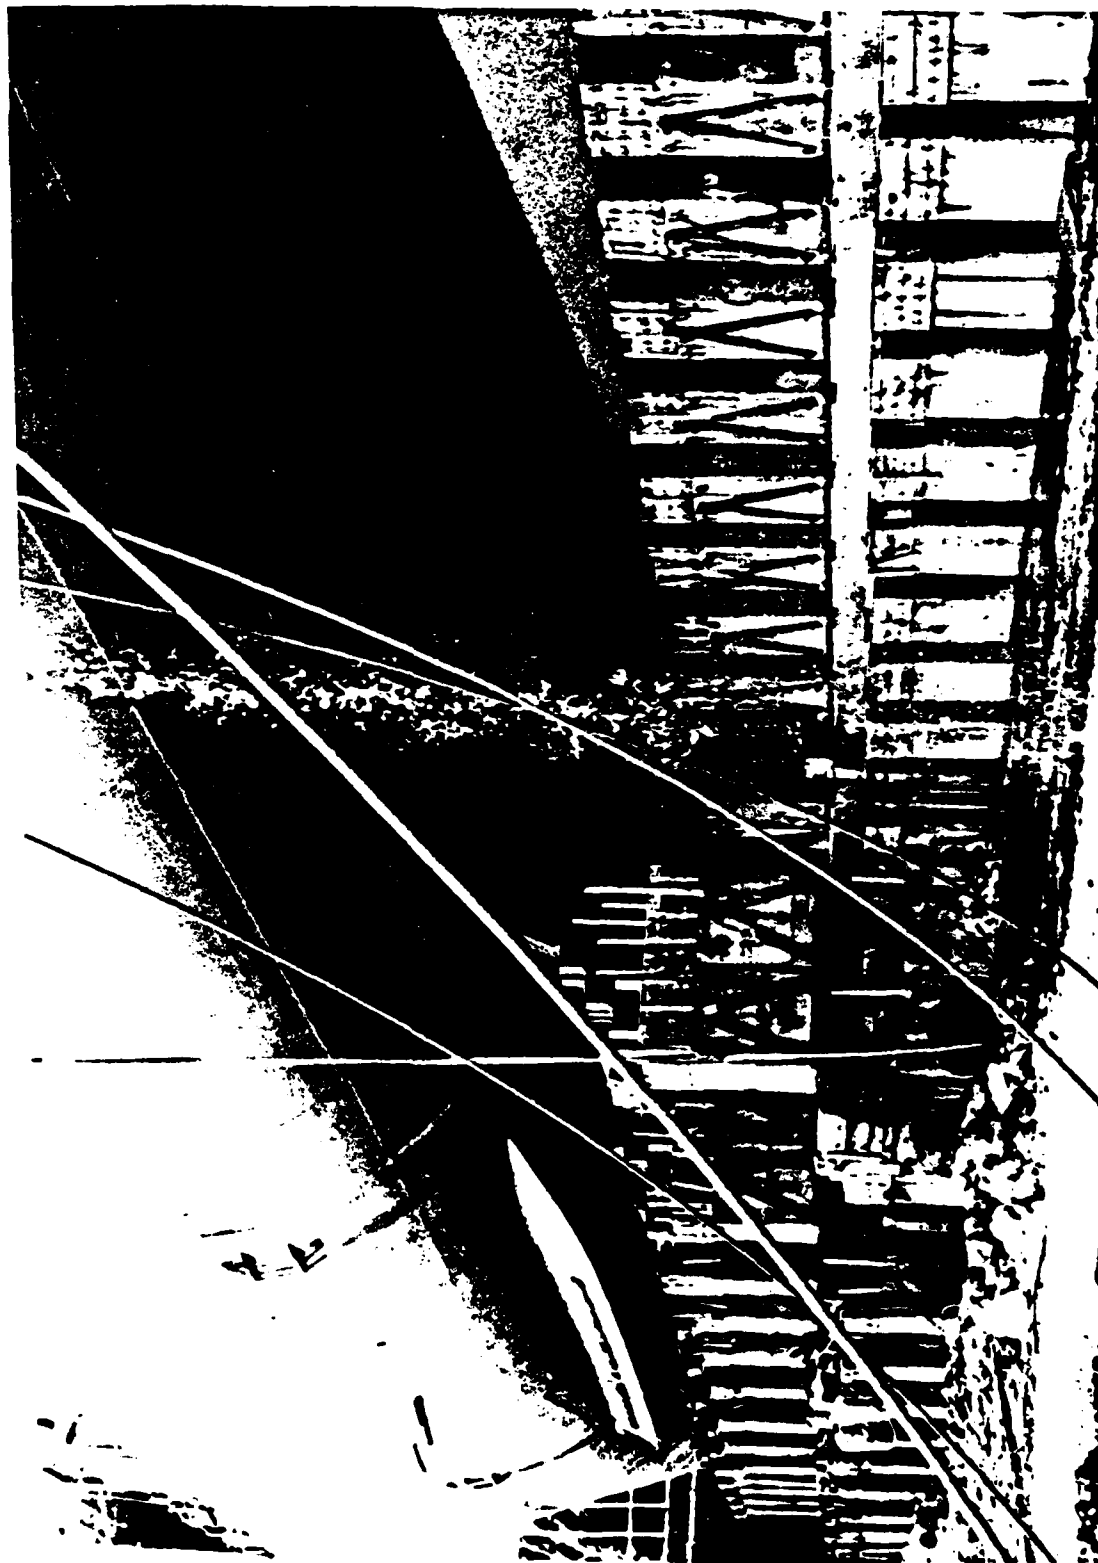


Figure 1 - View of Hull and Bilge Keel (U)

UNCLASSIFIED

CONFIDENTIAL

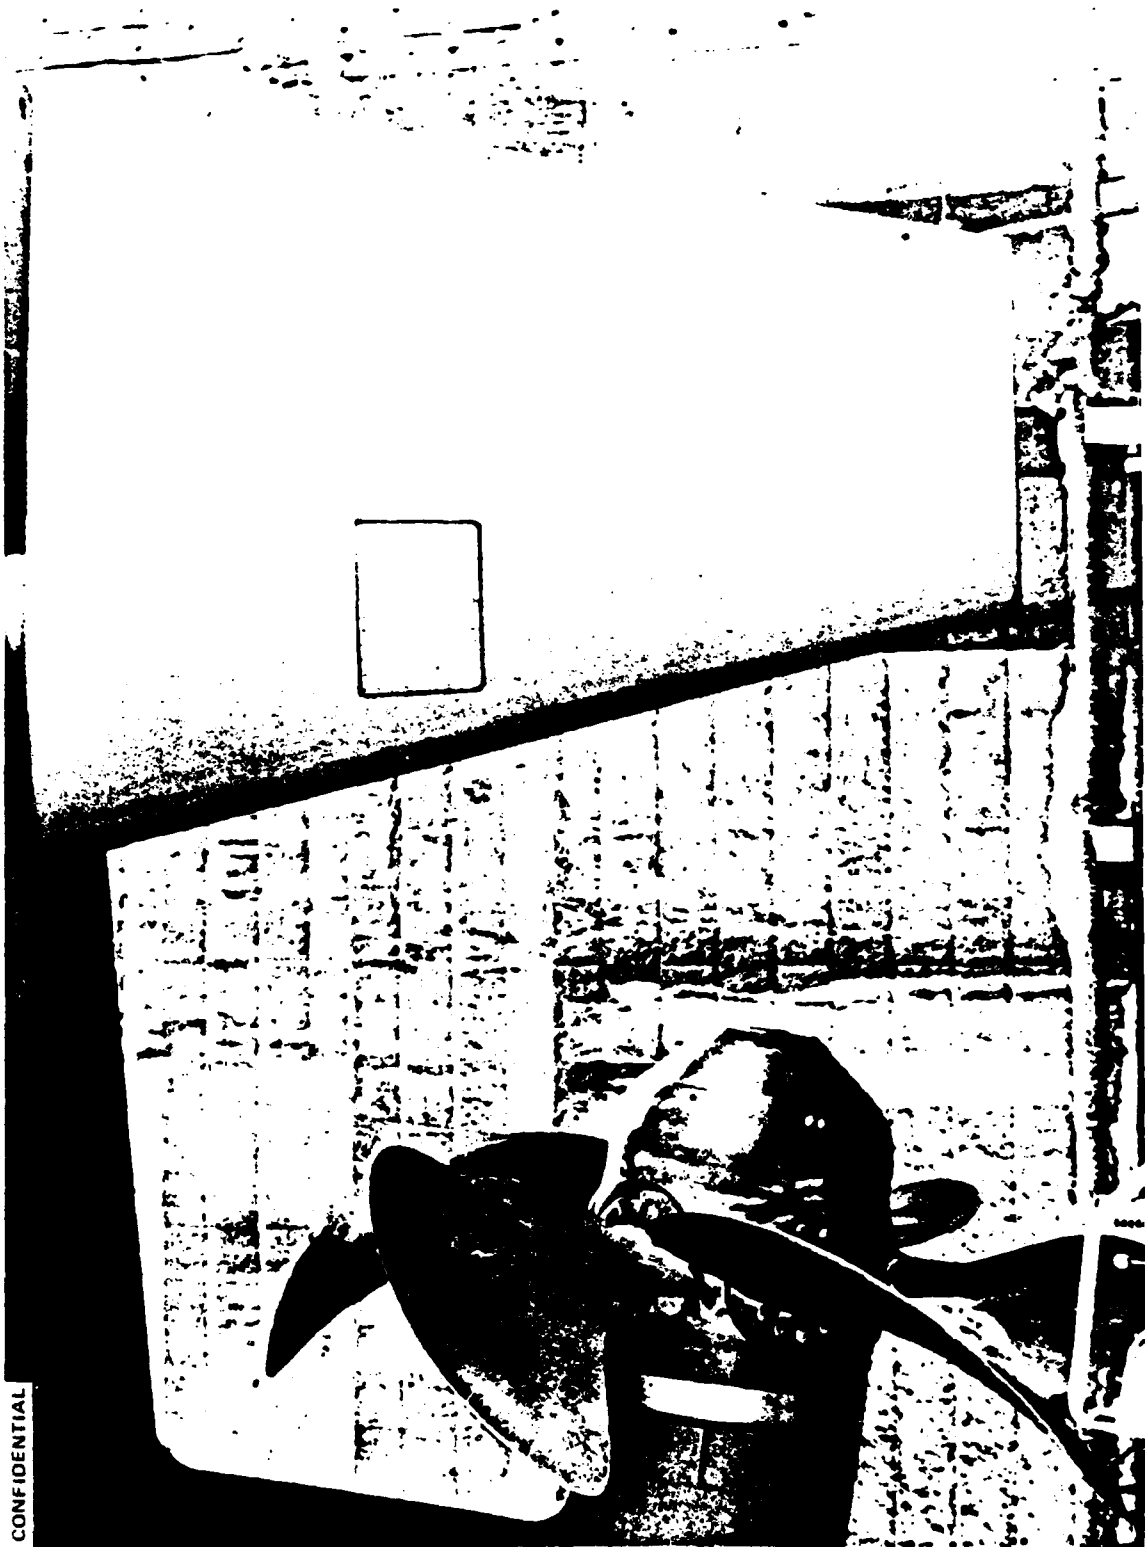

TRIAL PROCEDURES AND INSTRUMENTATION

(C) The trials were conducted in accordance with Chapter 094 of the Naval Ship's Technical Manual. Data were obtained over a 6-knot to full power speed range at the displacements listed in Table 2. Two to three passes were made over the three-dimensional range at selected speeds. The propulsion system can be operated in a program control mode or in a manual mode. When in the program control mode of operation, the propeller pitch can be controlled by turbine power or turbine speed. In the manual control mode of operation, shaft revolutions per minute (rpm) and propeller pitch are controlled independently. All program control mode runs were made in the power mode. Twin and single engine standardization trials were conducted in the program control power mode at heavy and light displacements. The effect of under- and over-design pitch was investigated and compared to the design pitch runs which were conducted in the program control, twin-engine mode. The off-design pitch runs were made in the remote manual, twin-engine mode at the heavy displacement. Single and twin auxiliary propulsion unit powering capabilities were also investigated. The effect of Prairie Masker on maximum speed was determined. These runs were conducted in the twin-engine, remote manual mode and at light displacement.

(U) The measurements taken during each run were shaft rpm, shaft horsepower (shp), shaft torque, shaft thrust, propeller pitch, EM log speed, AFWTF range coordinates, Mini-Ranger coordinates, ship's heading, and relative wind velocity and direction. Speed was calculated using AFWTF range coordinates and DTNSRDC Mini-Ranger coordinates. Both the DTNSRDC Mini-Ranger and AFWTF calculated speeds are listed in Tables 3 and 4. As can be seen, they compared very well; generally within 0.05 knot. AFWTF range data were not available on 19 May 1978, therefore, Mini-Ranger speed data are presented throughout the report for consistency. A DTNSRDC 60-tooth magnetic pick-up was used to measure rpm. From the shaft rpm and torque, the shaft horsepower was calculated. A strain gage type thrust-meter with 10 instrumented leveling plates (5 forward and 5 astern) was used to obtain thrust. Thrust data will not be available until a later date when a laboratory post-calibration can be accomplished on the thrust leveling plates. Relative wind velocity and direction were recorded from the ship's anemometer and true wind velocity and direction were calculated.

TABLE 3 - USS OLIVER HAZARD PERRY (FFG-7) STANDARDIZATION
TRIAL RESULTS, ENGLISH UNITS (U)

CONFIDENTIAL

Displacement ton	Pitch ft	Mini-Ranger Speed knot	AFWTF Speed knot	Shaft rpm	Torque lb-ft	SHP
12 MAY 1978, TWIN ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3720	13.3	6.38	6.14	49.4	34,550	330
	23.5	9.06	9.16	47.6	77,600	710
	23.5	11.71	11.76	61.1	121,000	1,410
	23.6	15.38	15.37	82.7	222,200	3,500
	23.6	18.44	18.50	100.6	327,050	6,270
	23.6	20.36	20.38	112.1	399,200	8,520
	23.6	23.70	23.70	131.0	539,200	13,450
	23.7	26.80	26.75	154.1	790,950	23,200
3720	23.7	29.20	29.36	178.1	1,075,500	36,480
12 MAY 1978, SINGLE ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3720	23.8	25.26	25.31	142.0	649,550	17,560
3720	23.8	7.94	8.00	42.1	63,550	510
3720	23.1	5.70	5.75	31.2	35,700	210
12 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, UNDER-DESIGN PITCH						
3720	19.0	9.66	9.63	59.0	77,850	880
	19.0	14.18	14.24	89.2	167,050	2,840
	19.0	18.47	18.48	118.7	292,950	6,630
	19.0	23.02	23.05	148.7	458,800	12,990
3720	19.0	26.26	26.24	178.2	674,850	22,900

TABLE 3 (Continued) (U)

CONFIDENTIAL

Displacement ton	Pitch ft	Mini-Ranger Speed knot	AFWTF Speed knot	Shaft rpm	Torque lb-ft	SHP
13 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, OVER-DESIGN PITCH						
3680	28.4	28.58	28.63	148.7	1,165,700	33,020
3680	28.4	24.52	24.53	119.0	678,050	15,370
3680	28.4	18.62	18.65	88.8	363,200	6,140
3680	28.4	13.04	12.98	59.9	164,400	1,880
13 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, DESIGN PITCH						
3680	23.7	11.12	11.11	59.4	104,000	1,180
13 MAY 1978, SINGLE AUXILIARY ENGINE MODE						
3680	28.4	1.85	2.38	--	--	--
13 MAY 1978, TWIN AUXILIARY ENGINE MODE						
3680	28.4	2.60	3.40	--	--	--
19 MAY 1978, TWIN ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3400 ↓ 3400	19.6	6.78	--	40.7	44,950	350
	24.6	8.49	--	43.5	73,450	610
	24.6	11.38	--	58.7	122,800	1,370
	24.6	14.57	--	75.1	199,200	2,850
	24.6	17.76	--	93.1	301,150	5,340
	24.6	20.45	--	108.4	402,100	8,300
	24.6	23.76	--	126.2	535,650	12,870
	24.6	26.88	--	148.8	784,500	22,240
	24.6	30.20	--	178.7	1,135,700	38,640

TABLE 3 (Continued) (U)

CONFIDENTIAL

Displacement ton	Pitch ft	Mini-Ranger Speed knot	AFWTF Speed knot	Shaft rpm	Torque lb-ft	SHP
20 MAY 1978, SINGLE ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3320	25.3	25.65	25.58	135.7	683,200	17,660
20 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, DESIGN PITCH*						
3320	25.0	30.30	30.29	180.1	1,183,850	40,600
20 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, DESIGN PITCH**						
3320	24.8	30.57	30.57	182.5	1,190,400	41,360

*With Prairie Masker System in operation.

**Without Prairie Masker System in operation.

TABLE 4 - USS OLIVER HAZARD PERRY (FFG-7) STANDARDIZATION
TRIAL RESULTS, METRIC UNITS (U)

CONFIDENTIAL

Displacement tonne	Pitch m	Mini-Ranger Speed knot	AFWTF Speed knot	Shaft rpm	Torque n-m	Power kw
12 MAY 1978, TWIN ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3780	4.0	6.38	6.14	49.4	46,800	240
	7.2	9.06	9.16	47.6	105,200	530
	7.2	11.71	11.76	61.1	164,100	1,050
	7.2	15.38	15.37	82.7	301,250	2,610
	7.2	18.44	18.50	100.6	443,400	4,670
	7.2	20.36	20.38	112.1	541,250	6,360
	7.2	23.70	23.70	131.0	731,100	10,030
	7.2	26.80	26.75	154.1	1,072,400	17,300
3780	7.2	29.20	29.36	178.1	1,458,200	27,210
12 MAY 1978, SINGLE ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3780	7.2	25.26	25.31	142.0	880,700	13,100
3780	7.2	7.94	8.00	42.1	86,150	380
3780	7.0	5.70	5.75	31.2	48,400	160
12 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, UNDER-DESIGN PITCH						
3780	5.8	9.66	9.63	59.0	105,550	660
	5.8	14.18	14.24	89.2	226,500	2,120
	5.8	18.47	18.48	118.7	397,200	4,940
	5.8	23.02	23.05	148.7	622,050	9,690
3780	5.8	26.26	26.24	178.2	915,000	17,080

TABLE 4 (Continued) (U)

CONFIDENTIAL

Displacement tonne	Pitch m	Mini-Ranger Speed knot	AFWTF Speed knot	Shaft rpm	Torque n-m	Power kw
13 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, OVER-DESIGN PITCH						
3739	8.6	28.58	28.63	148.7	1,580,500	24,620
3739	8.6	24.52	24.53	119.0	919,350	11,460
3739	8.6	18.62	18.65	88.8	492,450	4,580
3739	8.6	13.04	12.98	59.9	222,850	1,400
13 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, DESIGN PITCH						
3739	7.2	11.12	11.11	59.4	141,050	880
13 MAY 1978, SINGLE AUXILIARY ENGINE MODE						
3739	8.7	1.85	2.38	--	--	--
13 MAY 1978, TWIN AUXILIARY ENGINE MODE						
3739	8.7	2.60	3.40	--	--	--
19 MAY 1978, TWIN ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3454	6.0	6.78	--	40.7	60,950	260
	7.5	8.49	--	43.5	99,600	460
	7.5	11.38	--	58.7	166,500	1,020
	7.5	14.57	--	75.1	270,050	2,130
	7.5	17.76	--	93.1	408,300	3,980
	7.5	20.45	--	108.4	545,150	6,190
	7.5	23.76	--	126.2	726,250	9,600
	7.5	26.88	--	148.8	1,063,650	16,580
3454	7.5	30.20	--	178.7	1,539,750	28,810

TABLE 4 (Continued) (U)

CONFIDENTIAL

Displacement tonne	Pitch m	Mini-Ranger Speed knot	APWTF Speed knot	Shaft rpm	Torque n-m	Power kw
20 MAY 1978, SINGLE ENGINE MODE, PROGRAM CONTROL MODE, DESIGN PITCH						
3373	7.7	25.65	25.58	135.7	926,300	13,170
20 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, DESIGN PITCH*						
3373	7.6	30.30	30.29	180.1	1,605,050	30,280
20 MAY 1978, TWIN ENGINE MODE, MANUAL CONTROL MODE, DESIGN PITCH**						
3373	7.6	30.57	30.57	182.5	1,613,950	30,840
*With Prairie Masker System in operation **Without Prairie Masker System in operation.						

[REDACTED]

PRESENTATION AND DISCUSSION OF TRIAL RESULTS

(U) The maximum steady-state values as denoted in the trial agenda were:

1. Full power shaft torque (twin engine) - 1,167,111 pound-feet (1,582,390 newton-meters).
2. Full power shaft thrust (twin engine) - 281,850 pounds (1,253,725 newtons).
3. Maximum shaft torque (single engine) - 715,315 pound-feet (969,839 newton-meters).
4. Auxiliary propulsion motor (full load current) - 500 amperes.

(U) The results of the standardization trials conducted on USS OLIVER HAZARD PERRY (FFG-7) are tabulated in Tables 3 and 4 and are presented in Figures 3 through 6. Figures 3 and 4 are a comparison of the heavy and light displacement results run with the plant in the program control power mode and at the design pitch. It should be noted that the pitch was slightly different between heavy and light displacements. If the pitch at heavy displacement and the pitch at light displacement were the same, then a greater "spread" between the curves shown in Figures 3 and 4 would be apparent. Twin and single engine data are shown on these same curves with single engine data falling right on the twin engine curve as expected. In the twin engine propulsion mode, PERRY attained a speed of 29.3 knots at 178.1 rpm, 1,075,500 pound-feet (1,458,200 newton-meters) of shaft torque, and developed 36,480 shaft horsepower (27,200 kilowatts) for the heavy displacement of 3,720 tons (3,780 tonnes). At the twin engine light displacement of 3,400 tons (3,454 tonnes), the maximum speed attained was 30.2 knots at 178.2 rpm, 1,135,700 pound-feet (1,539,800 newton-meters) of shaft torque and 38,640 shaft horsepower (28,800 kilowatts).

(U) In the heavy displacement condition of 3,720 tons (3,780 tonnes), maximum single engine performance speed was 25.3 knots at 142 rpm, 649,560 pound-feet (880,700 newton-meters) of shaft torque and 17,560 shaft horsepower (13,100 kilowatts). For a light displacement of 3,320 tons (3,373 tonnes) the maximum single engine performance was found to be 25.6 knots at 136 rpm, 683,190 pound-feet (926,300 newton-meters) of shaft torque and 17,660 shaft horsepower (13,170 kilowatts).

UNCLASSIFIED

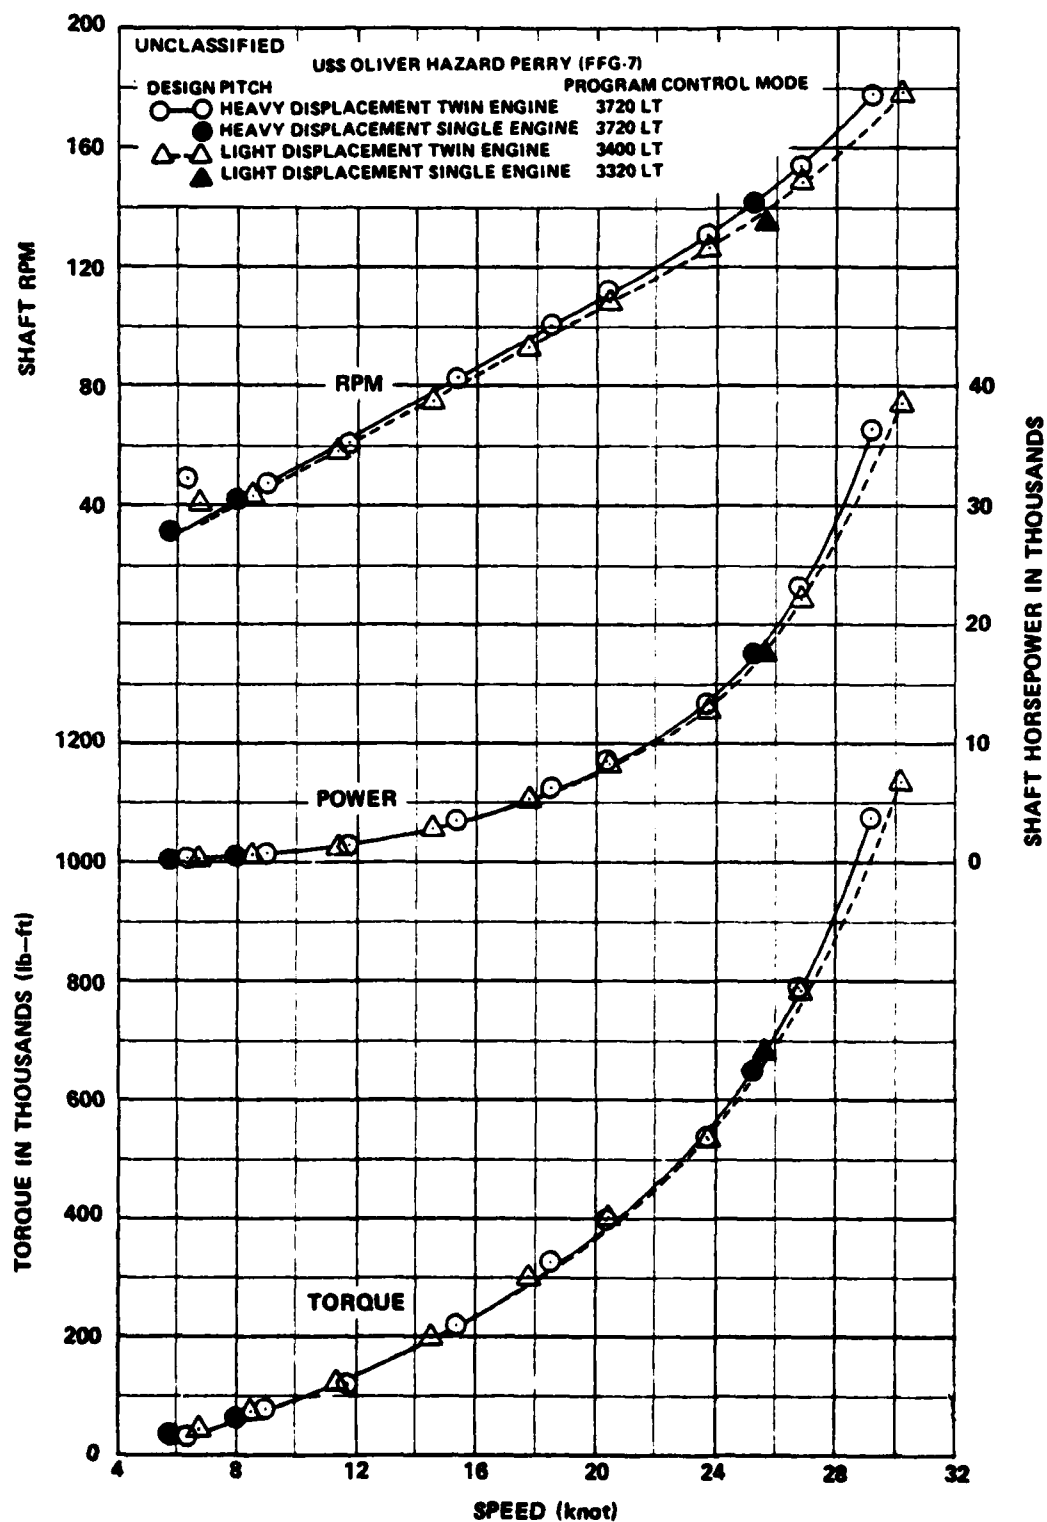


Figure 3 - Comparison of Heavy and Light Displacement Standardization Trial Results, English Units (U)

UNCLASSIFIED

UNCLASSIFIED

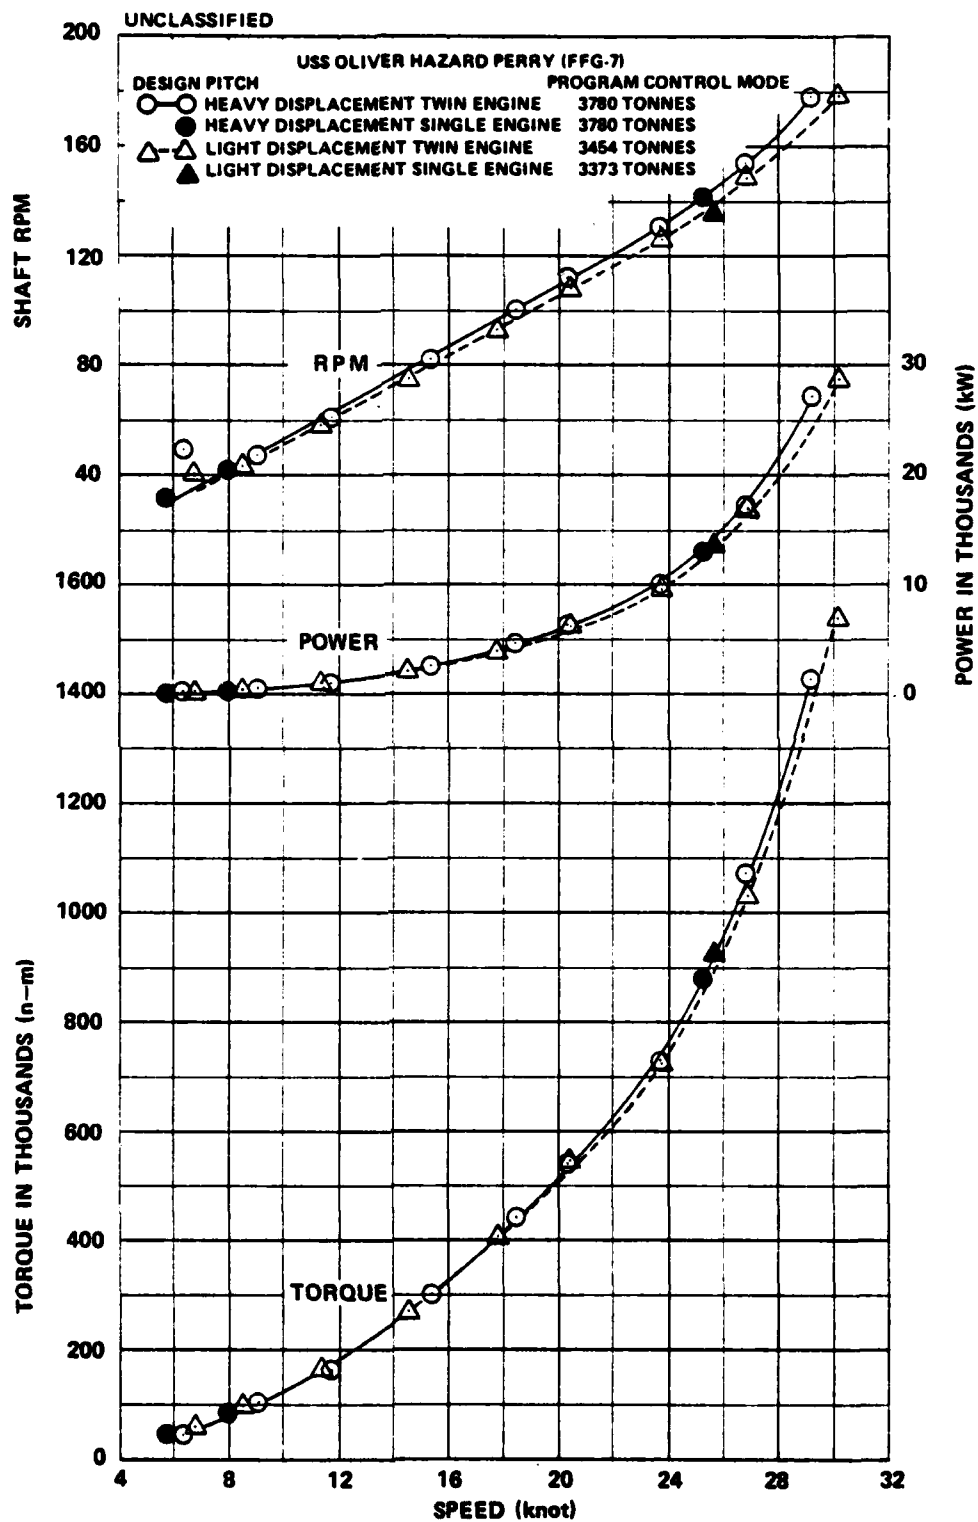


Figure 4 - Comparison of Heavy and Light Displacement Standardization Trial Results, Metric Units (U)

UNCLASSIFIED

UNCLASSIFIED

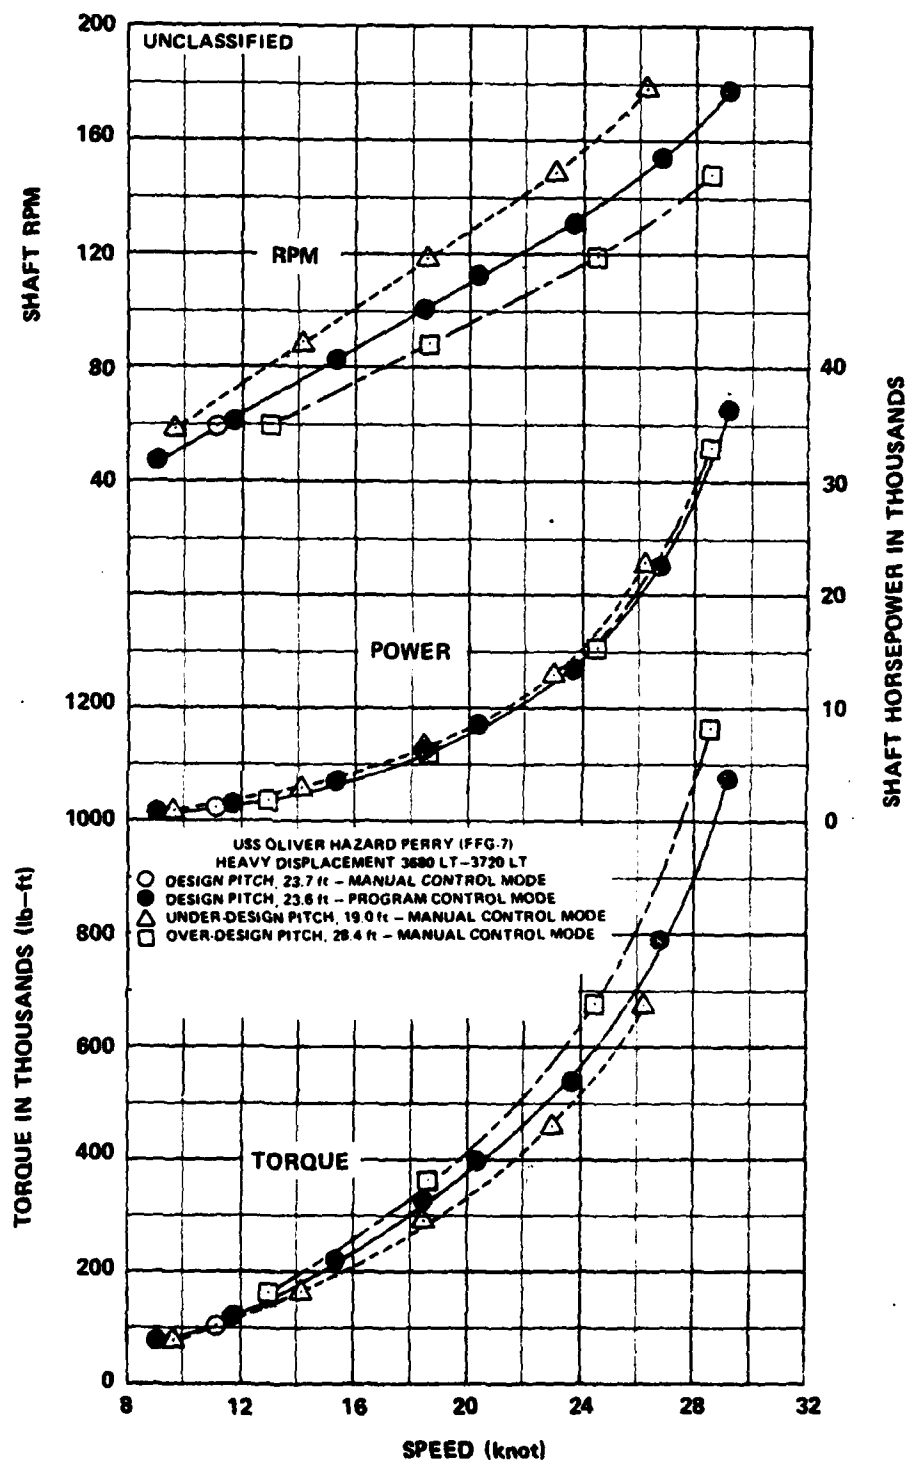


Figure 5 - Comparison of Heavy Displacement Standardization Trial Results Utilizing Different Propeller Pitch Settings, English Units (U)

UNCLASSIFIED

UNCLASSIFIED

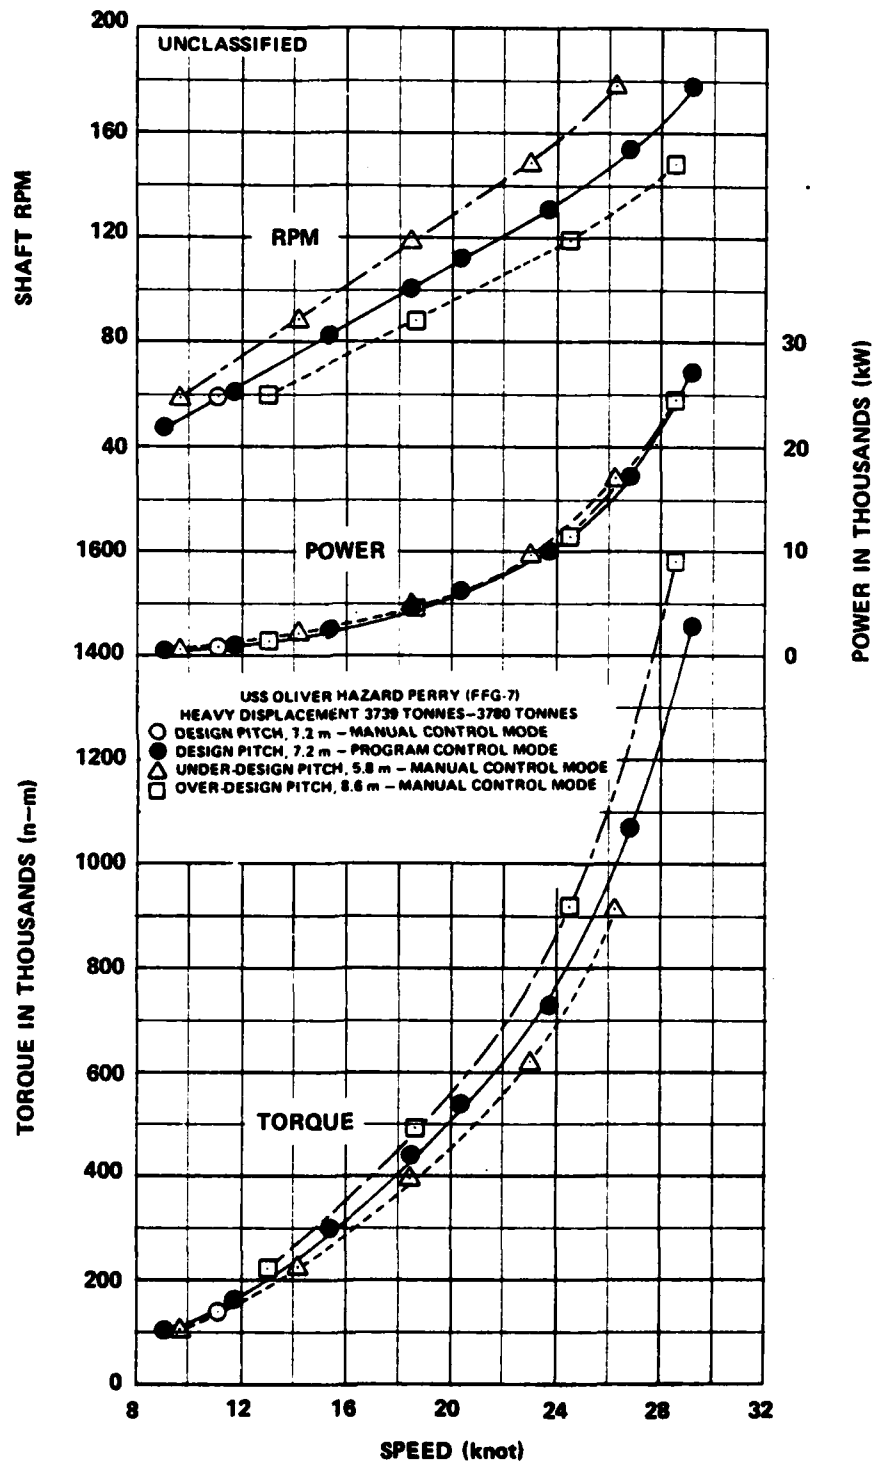


Figure 6 - Comparison of Heavy Displacement Standardization Trial Results Utilizing Different Propeller Pitch Settings, Metric Units (U)

UNCLASSIFIED

[REDACTED]

(U) For both the heavy and light displacements in the twin engine mode, at speeds less than 8 knots, it can be observed that rpm does not fair along the respective curves. At these low speeds, the propeller is not programmed to operate at design pitch. This accounts for the "misaligned" data points.

(U) The effects of under- and over-design pitch on PERRY's propulsion characteristics are presented in Figures 5 and 6 and are tabulated in Tables 3 and 4. The over- and under-design pitch conditions were run at heavy displacement using the twin engine manual control mode. These data are compared with the design pitch data obtained in the program control mode. A single design pitch data point was taken using the manual control, twin engine mode as a check on the program control data. This data point, at a speed of 11.1 knots, compared quite favorably with the program control data. The under-design pitch condition (1.15 P/D, 19.0 feet (5.79 meters)), which was rpm limited, proved to be less efficient from a power-speed aspect than the design pitch throughout the speed range. A maximum speed of 26.3 knots was attained at 178 rpm, 22,900 shaft horsepower (17,075 kilowatts) and 674,860 pound-feet (914,990 newton-meters) of shaft torque. For speeds less than 24 knots in the over-design pitch condition (1.72 P/D, 28.4 feet (8.66 meters)), the over-design pitch proved to be just as efficient as design pitch while at speeds above 24 knots, it was not as efficient. However, it should be noted that this pitch condition was conducted with the ship at a slightly lighter displacement of 3,680 tons (3,739 tonnes). This pitch condition was found to be torque limited with a maximum speed of 28.6 knots attained at 149 rpm, 33,000 shaft horsepower (24,600 kilowatts), and 1,165,700 pound-feet (1,580,500 newton-meters) of shaft torque. Design pitch, as expected, proved to be the better of the three pitches from a power versus speed standpoint.

(U) Tests of the ship's auxiliary propulsion units at heavy displacement were also conducted. Speeds of 1.9 and 2.6 knots were obtained for the single and twin auxiliary propulsion tests, respectively. The displacement of the ship during these tests was 3,680 tons (3,739 tonnes). While attaining these speeds, the ship experienced difficulty in maintaining headway and direction in a State 2 sea.

~~CONFIDENTIAL~~

(C) With the plant in the twin engine manual control mode and design pitch, tests were run with and without the Prairie Masker system in operation to determine the effect on maximum speed. These runs were conducted by increasing the shaft rpm until either the torque or rpm reached its maximum steady state operation limit. A speed of 30.3 knots at 180 rpm, 1,183,800 pound-feet (1,605,000 newton-meters) of shaft torque and 40,600 shaft horsepower (30,280 kilowatts) was obtained with the Prairie Masker system in operation. Without the Prairie Masker system in operation, a speed of 30.6 knots at 182 rpm, 1,190,380 pound-feet (1,613,930 newton-meters) of shaft torque, and 41,360 shaft horsepower (30,840 kilowatts) was obtained. The ship's displacement at this time was 3,320 tons (3,373 tonnes) which was the lightest displacement tested. As can be seen, only one percent difference in speed and two percent difference in shaft horsepower were observed.

CONCLUSIONS

(U) The results of the standardization trials of USS OLIVER HAZARD PERRY (FFG-7) are considered to be good and the data applicable to, and representative of, the FFG-7 Class at the same displacements with a clean hull and propeller. The following conclusions can be drawn from the standardization trials.

(U) 1. The maximum speed attained in the heavy displacement program control mode for twin engine was 29.2 knots. The maximum speed attained for the single engine configuration was 25.3 knots.

(U) 2. The maximum speed attained in the light displacement program control mode for twin engine was 30.2 knots. The maximum speed attained for the single engine configuration was 25.7 knots.

(U) 3. Heavy and light displacement powering data for the program control power mode utilizing single and twin engine modes of operation compared favorably.

(U) 4. As expected, design pitch is the most efficient of the three pitch conditions from a power versus speed standpoint. It was also noted that the under-design pitch condition was rpm limited and the over-design pitch was torque limited.

~~CONFIDENTIAL~~

(U) 5. Ship speeds of 1.9 and 2.6 knots were achieved using one auxiliary propulsion engine and then both auxiliary propulsion engines, respectively. These electric propulsion units provided poor steering capability and the ship had trouble maintaining headway in a State 2 sea.

(C) 6. Comparison of powering data with and without Prairie Masker in operation shows there is little difference in the powering characteristics of PERRY.

UNCLASSIFIED

INITIAL DISTRIBUTION

Serials

1- 2 CNO (OP371D)
3 CINCLANTFLT
4 CINCPACFLT
5- 6 COMNAVSURFLANT
7- 8 COMNAVSURFPAC
9-21 NAVSEA
 9 SEA 037
 10-11 SEA 09G3
 12-21 PMS 399
22-23 NAVSEC
 22 SEC 6144
 23 SEC 6148
24 NSWSES PORT HUENEME (6112)
25 NSWSES NORFOLK
26 SUPSHIPS BATH
27 SUPSHIPS BOSTON
28 SUPSHIPS BROOKLYN
29 SUPSHIPS CHARLESTON
30 SUPSHIPS GROTON
31 SUPSHIPS JACKSONVILLE
32 SUPSHIPS LONG BEACH
33 SUPSHIPS NEW ORLEANS
34 SUPSHIPS NEWPORT NEWS
35 SUPSHIPS PASCAGOULA
36 SUPSHIPS PEARL HARBOR
37 SUPSHIPS PORTSMOUTH

Serials

38 SUPSHIPS SAN DIEGO
39 SUPSHIPS SAN FRANCISCO
40 SUPSHIPS SEATTLE
41 SUPSHIPS STURGEON BAY
42 NAVSHIPYD CHARLESTON
43 NAVSHIPYD LONG BEACH
44 NAVSHIPYD MARE ISLAND
45 NAVSHIPYD NORFOLK
46 NAVSHIPYD PEARL HARBOR
47 NAVSHIPYD PHILADELPHIA
48 NAVSHIPYD PORTSMOUTH, NH
49 NAVSHIPYD PUGET SOUND
50 USS OLIVER HAZARD PERRY
 (FFG-7)

CENTER DISTRIBUTION

Serials	Code	Name
51	15	
52	1502	V.J. Monacella
53	152	
54	1524	W.C. Lin
55	1536	R.J. Stenson
56	154	W.B. Morgan
57	156	G.R. Hagen
58	1568	G.G. Cox
59	19	M. Sevik
60	1921	G. Galane

UNCLASSIFIED

[REDACTED]

Serials	Code	Name
61-72	5211.1	Reports Distribution
73	522.4	Classified Lib. (C)
74	522.5	Classified Lib. (A)

[REDACTED]

DTNSRDC ISSUES THREE TYPES OF REPORTS

- 1. DTNSRDC REPORTS, A FORMAL SERIES, CONTAIN INFORMATION OF PERMANENT TECHNICAL VALUE. THEY CARRY A CONSECUTIVE NUMERICAL IDENTIFICATION REGARDLESS OF THEIR CLASSIFICATION OR THE ORIGINATING DEPARTMENT.**
- 2. DEPARTMENTAL REPORTS, A SEMIFORMAL SERIES, CONTAIN INFORMATION OF A PRELIMINARY, TEMPORARY, OR PROPRIETARY NATURE OR OF LIMITED INTEREST OR SIGNIFICANCE. THEY CARRY A DEPARTMENTAL ALPHANUMERICAL IDENTIFICATION.**
- 3. TECHNICAL MEMORANDA, AN INFORMAL SERIES, CONTAIN TECHNICAL DOCUMENTATION OF LIMITED USE AND INTEREST. THEY ARE PRIMARILY WORKING PAPERS INTENDED FOR INTERNAL USE. THEY CARRY AN IDENTIFYING NUMBER WHICH INDICATES THEIR TYPE AND THE NUMERICAL CODE OF THE ORIGINATING DEPARTMENT. ANY DISTRIBUTION OUTSIDE DTNSRDC MUST BE APPROVED BY THE HEAD OF THE ORIGINATING DEPARTMENT ON A CASE-BY-CASE BASIS.**

**DAT
FILM**